


Reflecta-Floor Plus With Flap

THERMAL & SOUND INSULATION



Reflecta-Floor Plus With Flap offers our customers an exceptionally easy to install and highly thermally efficient solution to insulating timber frame, new built homes.

GI Building Sciences™ Reflecta-Floor Plus With Flap is rolled out in parallel direction to floor joists ensuring that it is set in-between joists with the antiglare side facing upwards. The insulation is gently pushed down on the rolled-out sections of the insulation so that the material is set to the depth in line with the bottom of the floor joists. Our insulation system is designed specifically for the Australian Climate.

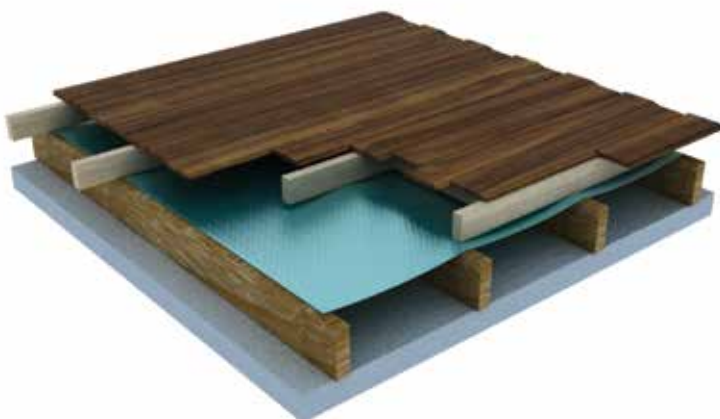

KEY BENEFITS

- ✓ Perforated for Drainage in the Event of Exposure to Wet Weather
- ✓ Thermo Cellular Core providing a Barrier Against Conductive Heat
- ✓ Two Outer Layers of 99%+ Pure Aluminium, with XHDRating
- ✓ Passes All Relevant Australian Standards Fire Tests
- ✓ A Fibre Free Alternative, without Proprietary Fixings or Special Protective Clothing
- ✓ Reduced on site Wastage and Improved Coverage compared to Other Products

SIZES - 30m² ROLLS

Reflecta-Floor Plus With Flap
22.25m L x 1.35m W x 4mm Thick
(With 150mm flap)

SPECIFICATIONS

	Reflecta-Floor Plus With Flap
Product Code	4mm Floor
Silver Side Reflectance	97%
Antiglare Side Reflectance	95%
Roll Size	1.35m x 22.25m (30m ²)
Roll Diameter	320mm (±7%)
Product Thickness	4.0mm (±0.5mm)
Roll Weight	13kg (±7%)

Declared Total R Values (m² K/W)

Heatflow	INWARD	OUTWARD
Floor	2.04	2.63
Material R-value at 23°C	0.10	

All calculations are for unventilated roof and wall cavities
For specific calculation details please contact GI Building Sciences

These products meets the requirements of AS/NZS 4200.1		
Duty	Extra Heavy	
Vapour Classification	Class 2	Vapour Barrier
Vapour Permeability	0.0160 µg/N.s	
Water Control Classification	Water Barrier	
Flammability Index	Low (≤5)	
Electrical Conductivity	Conductive	

Emittance	Value	Classification	Category
Silver Side	0.03	IR Reflective	RR
Antiglare Side	0.05	IR Reflective	

Classifications in Accordance with AS/NZS 4200.1 & This product should be installed in accordance with AS 4200.2

Assessed by James Fricker

This product conforms with AS/NZS 4859.1

PRODUCT TESTING

Testing Name	Testing Standard	Testing Result
Thermal Performance	ASTM C518	0.10 (m ² K/W)
Flammability Index	AS 1530.2	≤5 (Low)
Ignitability Index	AS/NZS 1530.3	0
Spread of Flame Index	AS/NZS 1530.3	0
Heat Evolved Index	AS/NZS 1530.3	0
Smoke Developed Index	AS/NZS 1530.3	2
Resistance to Dry Delamination	AS/NZS 4201.1	Pass
Resistance to Wet Delamination	AS/NZS 4201.2	Pass
Shrinkage	AS/NZS 4201.3	Comply
Edge Tearing Resistance	TAPPI T470 om-89	Extra Heavy Duty
Surface Corrosion	AS/NZS 4859.1 App I	Pass
Water Vapour Transmission	ASTM E96	Class 2, Vapour Barrier
Resistance to Water Penetration	AS/NZS 4201.4	Water Barrier
Emittance	ASTM E408	Category: RR IR Reflective: Silver (0.03) & Antiglare (0.05)
Electrical Conductivity	AS/NZS 3100	Conductive
Acoustic	ISO 354 AS ISO 11654 AS 1191 AS/NZS ISO 717.1	10 dB in 1/3 rd octave band
Impact Resistance	AS 2870	Pass



FIRE SAFE



COMFORT, HEALTH & AMENITY



CONDENSATION CONTROL



SOUND PROTECTION



REDUCED POWER COSTS

Products are to be stored standing upright and on pallets not more than two high. Product warranty is voided for any product stored horizontally resulting in squeeze or crush. Returns of product displaying effects of deformation due to incorrect storage practices will not be accepted.

The product information included in this publication is provided in good faith in order to ensure the optimum performance of this product. However, no warranty is given or implied with respect to this information or the product itself regarding the product's suitability for any particular purpose, as factors outside our knowledge and control may affect its use. The usage of this and other building membranes will affect moisture migration in the building element. The purchaser is responsible for independently determining the suitability of the product for the intended purpose. GI Building Sciences Pty Ltd reserves the right to amend product specifications without prior notice. Information provided is considered to be true and correct at the time of publication.

Issued July 2022